

Specifications



Model		QVN3104H	QVN3108H	QVN3116H
System	OS	Embedded Linux		
Video	Network Input	4 CH IPC input	8CH IPC input	16CH IPC input
	Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF		
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024/ 1024 × 768 VGA: 1920 × 1080 / 1280 × 1024/ 1024 × 768		
	Screen Display Mode	1/4	1/4 /6/8/9	1/4 /6/8/9/13/16
	Compression	H.265S / H.265+ / H.265 / H.264		
Audio	Network Input	4 CH IPC audio input	8 CH IPC audio input	16 CH IPC audio input
	Local Input	RCA × 1 (for two-way audio)		
	Local Output	RCA × 1		
	Compression	G.711(U/A)		
Record	Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF		
	Frame Rate	NTSC:30fps; PAL:25fps		
Playback	Simultaneous Playback	Max. 4 CH	Max. 8 CH	Max. 16 CH
	Search	Time slice / time / event / tag search		
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events		
	Function	Play, pause, FF, FB, digital zoom, etc.		
Decoding Capability	Live View/ Playback	1×8MP@30fps; 6×1080P@30fps		
Alarm	Mode	Manual, sensor, motion, exception, smart events		
	Input	Support IPC alarm input		
	Output	Support IPC alarm output		
	Triggering	Record, snap, preset, e-mail, etc.		
Network	Interface	RJ45 1000Mbps × 1		
	Protocol	TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, HTTP, SMTP, HTTPS, 802.1x, RTSP, RTP, RTCP, WebSocket, SNMP, IGMP, ONVIF		
	Incoming/ Outgoing Bandwidth	80/80 (Mbps)	80/80 (Mbps)	160/160 (Mbps)
		*When the AI function of the IPC is enabled, the actual incoming bandwidth(max.bitrate) is more than the set value in the NVR.		
	Client Connection	Max. 64 users access		
Face	Face Detection Performance (AI by IPC)	4 CH	8 CH	16 CH
	Face Detection Performance (AI by Device)	2 CH (2MP)		
	Face Match Performance	No		
	Statistical Graph of Information	Bar graph		
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period		
Perimeter Protection	Human/Vehicle Classification (AI by IPC)	4 CH	8 CH	16 CH
	Human/Vehicle Classification (AI by Device)	2 CH(2MP)		
Video Metadata	Human/Vehicle Attribute Analysis (AI by IPC)	Yes		

Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP
	Plate Recognition (AI by IPC)	Yes
Mobile Device	OS	iOS, Android
Storage	HDD Interface	SATA3.0 × 1, max 10T
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	USB	USB 2.0 × 2
	Remote Controller	Optional
Others	Power Supply	DC 12V/1.5A
	Consumption	≤ 10W (without HDD)
	Dimensions (mm)	300 × 249 × 45 (W × D × H)
	Working Environment	-10 ~ 50°C, 10% ~ 90% humidity
	Certificate	CE, FCC
	Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE

Features

- Support 4/8/16 CH 8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/DI/CIF IP input
- H.265S/ H.265+ / H.265/ H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor/ POS/ AI recording
- Playback : 4 /8/16CH simultaneous playback
- Search : time slice, time, event, tag, smart search
- Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, line crossing, video exception, etc.
- Support POS information overlay on live view and playback
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

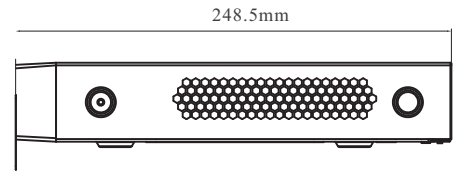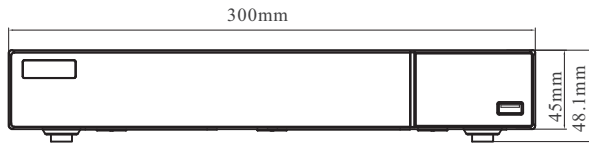

Rear Panel

